
XMLmind XML Editor - Support of MathML 2.0

Hussein Shafie, XMLmind Software

<xmleditor-support@xmlmind.com>

May 22, 2018

Abstract


This document describes everything you need to know to add equations to your XML documents.

Table of Contents

1. Introduction	1
2. How to add equations to your XML documents	2
3. Using the MathML tool	3
3.1. Parsing simple math expressions as MathML	5
3.2. Sample editing session	6
3.3. Modifying existing equations	8
3.4. Useful tips	9
4. MathML preferences	9
4.1. Bundled math fonts	11
A. Conformance with the MathML 2 W3C standard	11
B. Contents of the "MathML support" add-on	12
C. Customizing the MathML add-on	13
1. Customizing the contents of the MathML tool	13
2. Bundling better math fonts	13
D. Integrating MathML with document types other than DocBook 5, DITA Topic and XHTML 5	15

1. Introduction

XMLmind XML Editor natively supports MathML 2.0 *presentation markup*¹ by the means of an add-on called "MathML support".

 If you are interested in adding equations to your XML documents, you need to make sure that the "MathML support" add-on has been installed. This is done using menu item "Options → Install Add-ons".

This MathML add-on:

- allows to create standalone MathML documents,
- tightly integrates MathML presentation markup with DocBook 5,
- tightly integrates MathML presentation markup with DITA topics,
- tightly integrates MathML presentation markup with XHTML 5.

How, in practice, to add equations to your XML documents is described in How to add equations to your XML documents [2]. The precise contents of the add-on is detailed in Appendix B, *Contents of the "MathML support" add-on* [12].

Native support means that MathML elements are treated like any other element. That is, XMLmind XML Editor does *not* embed a specialized math editor. On the contrary, all commands, all kinds of selection, work fine with

¹The content markup is not supported at all. Content elements are rendered as tree views.


MathML elements. However, using the generic commands requires you to learn MathML. If you don't want to do that, for example, because you just want to type a couple of equations, then simply use the MathML tool which is installed by the add-on just below the Edit tool, at the top/right of the main window. Using the MathML tool is explained in Section 3, "Using the MathML tool" [3].

2. How to add equations to your XML documents

- If you are authoring DocBook 5 documents, insert an `equation`, `informalequation` or `inlineequation` containing a MathML `mml:math` child element into your document, then edit the contents of this `mml:math` child element normally, using the Edit tool and/or the MathML tool (see below [3]).

In order to insert insert an `equation`, `informalequation` or `inlineequation` containing a MathML `mml:math` child element into your DocBook 5 document,

- Use the Edit tool and choose one of the `equation(mathml)`, `informalequation(mathml)` or `inlineequation(mathml)` element templates.
- OR use the "Add MathML Equation" found in the DocBook tool bar.



- Same approach if you are authoring a DITA topic or an XHTML 5 page.
- For all document types other than DocBook 5, DITA topics and XHTML 5 (DocBook 4, XHTML 1.x, etc), you must treat MathML as if it were a graphics format such as SVG or PNG.

Unlike what happens for DocBook 5 documents, DITA topics and XHTML 5 pages, you'll not be able to directly edit the MathML elements, but if you install this MathML add-on (which depends on the add-on called "JEuclid image toolkit plug-in" — see 5 [13]), the MathML elements will be properly rendered on screen and also properly converted to formats such as HTML, PDF, RTF, etc.


In practice, this means:

- a. Create a standalone MathML document using File → New, MathML, "Inline Math" or "Math Block".
- b. Reference this MathML document in the proper ``image element":

DocBook 4 example	<code><imagedata fileref="equations/equation1.mml"/></code>
XHTML 1.x example	<code></code>

3. Using the MathML tool

Figure 1. The MathML tool

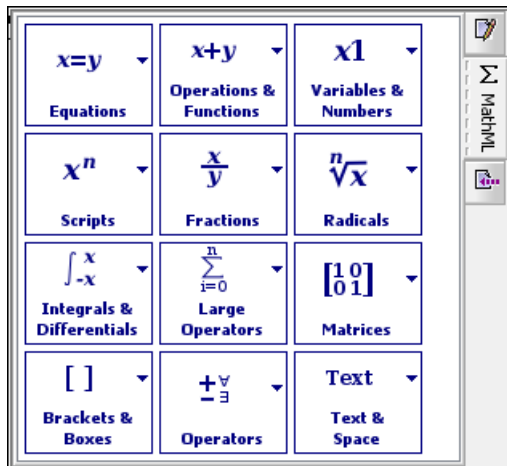


Using the MathML tool does not require you to learn MathML presentation markup. However there are three points you must learn, understand and remember before using this tool:

1. Clicking on a tool in a palette always *replaces the implicitly or explicitly selected element*² by the MathML template clicked upon.

²The explicitly selected nodes have a red box drawn around them. In absence of explicitly selected nodes, the implicitly selected element is the element having a text node child containing the caret.

Figure 2. Clicking on the "xⁿ Scripts" button in the MathML tool displays the Scripts palette

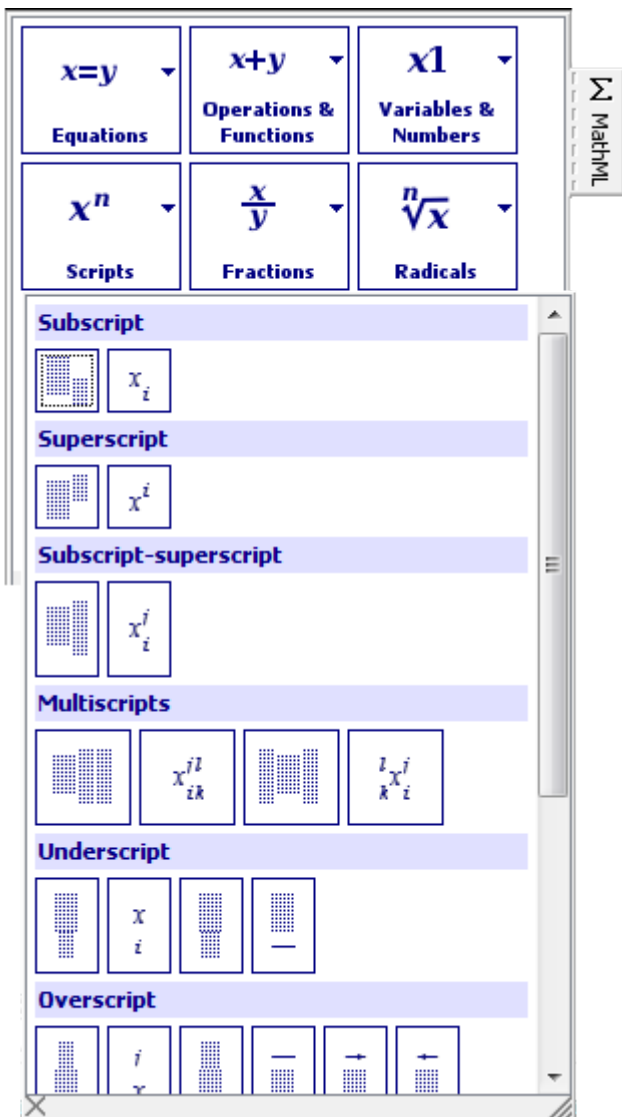

2. A section in a palette³ always starts with a completely empty template followed by one or more samples of this template.

These samples show you how, once filled, the empty template looks like. They are also useful by themselves: you may prefer clicking on them rather than the empty template and then, use the normal text selection to replace some of the text they contain.

3. As always with XMLmind XML Editor, you need to type text in the placeholders contained in the newly inserted math template. MathML has three main text containers:

mi

represents identifiers: variable names, function names, constants, etc.

mn

represents numbers.

³In the above screenshot, the first section of the Scripts palette is Subscript, the second one is Superscript, etc

Of course, as we'll see it in Section 3.2, "Sample editing session" [6], this facility is also very handy when used in conjunction with MathML tool.

Supported expressions

The simple math expressions which can be successfully parsed by Parse Text As MathML can be quickly described as follows:

- Numbers are parsed as `mn`.
- Identifiers starting with a letter, optionally followed by letters and/or digits are parsed as `mi`. However, the following special, *case-sensitive*, identifiers are translated to a single math character:
 - Lower-case Greek letters: alpha, beta, gamma, delta, epsilon, zeta, eta, theta, iota, kappa, lambda, mu, nu, xi, omicron, pi, rho, sigma, tau, upsilon, phi, chi, psi, omega.
 - Upper-case Greek letters: Alpha, Beta, Gamma, Delta, Epsilon, Zeta, Eta, Theta, Iota, Kappa, Lambda, Mu, Nu, Xi, Omicron, Pi, Rho, Sigma, Tau, Upsilon, Phi, Chi, Psi, Omega.
 - Miscellaneous symbols: `NN` (N), `ZZ` (Z), `QQ` (Q), `RR` (R), `CC` (C), `emptyset` (\emptyset), `infty` (∞).
- The only operators which are supported are: `=`, `!=` (not equal), `<`, `<=`, `>`, `>=`, `+` (unary or binary), `-` (unary or binary), `*` (translated to `⁢`), `/` (means "division", not "fraction"), `^` (exponent) and `_` (here underscore means "indice"); all with their usual precedence.
- You can use parentheses for grouping. However if you do so, these parentheses will show up as `mo` elements in the MathML. If you do not want to see the parentheses in the MathML, use `{ }` instead of `()`.
- Functions such `f(x, y, z)` as are also supported.
- Whitespace is ignored.

Examples:

Text	MathML
<code>2*x <= -y/0.5 <= z^i <= v_j <= w^i_j</code>	$2x \leq -y/0.5 \leq z^i \leq v_j \leq w^i_j$
<code>z = x^(2*i) + y^{2*i}</code>	$z = x^{(2i)} + y^{2i}$
<code>cos(pi/2)</code>	$\cos(\pi/2)$
<code>sin(-x) = -sin(x)</code>	$\sin(-x) = -\sin(x)$


3.2. Sample editing session

Tip


First write down *on a paper* the equation you want to author using the MathML tool. By constantly referring to your paper while using the MathML tool, you'll clearly see all the top to bottom steps needed to perform your task.

Suppose that you need to insert the following equation in a DocBook 5 document: $F = \frac{Gm_1m_2}{d^2}$.


1. Use the "Add MathML equation" button found in the DocBook toolbar and select `inlineequation`.
2. Click inside the newly inserted element and select the Equations palette in the MathML tool. Click on the Equation template:




This gives you:




3. Type "F" in the left placeholder:




4. Click in the right placeholder then click on the first template of the "Fractions" palette.

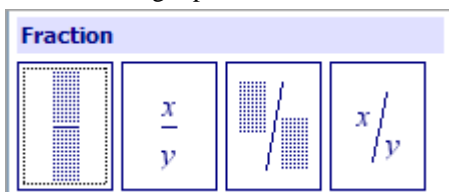


This gives you:




5. Type "G*m_1*m_2" in the top placeholder.



6. Press **Ctrl+Shift+SPACE** to invoke menu item DocBook \rightarrow Parse Text As MathML.

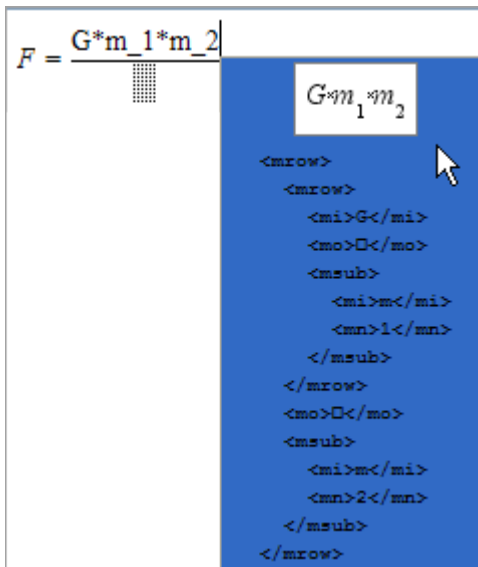

7. Press Down then Enter to accept what's suggested in the popup.





8. Type "d^2" in the bottom placeholder.

9. Press **Ctrl+Shift+SPACE** to invoke menu item DocBook \rightarrow Parse Text As MathML.

10. Press Down then Enter to accept what's suggested in the popup.

3.3. Modifying existing equations

Let's suppose you have entered the following equation: $y = \frac{2x}{3}$. After doing that, you realize that the correct equation is in fact: $y = \frac{2x}{3} + 1$. One way to correct the equation is to:



1. to explicitly select $\frac{2x}{3}$,
2. press **Ctrl+C** to copy the fraction to the clipboard,
3.  click the  template from the "Operations & Functions" palette to replace the selection,
4. explicitly select the left m_i placeholder,
5. press **Ctrl+V** to paste the fraction,
6. Finally, replace the right m_i placeholder by an m_n element containing 1.

Fortunately there is a much quicker way to do this: *using the text selection* rather than the implicit or explicit element selection.

When you use the text selection:


- a. In fact, you select the MathML element which is the *common ancestor* of all the elements involved in the text selection. Note that this text selection is not used per se, therefore there is no need to be precise to the character.
- b. The MathML tool *wraps* the selected MathML element in the template clicked upon, rather than *replace* the selection by the template clicked upon. That is, you'll not loose what you have already typed.

Therefore the most efficient way to correct the above equation is to proceed as follows:

1. select "2 x 3" normally, by dragging your mouse over this text,
2.  click the  template in order to wrap the fraction (which is "common ancestor of the text selection"),
3. Finally, replace the right m_i placeholder by an m_n element containing 1.

This worked fine, but what if the correct equation was $y = 1 + \frac{2x}{3}$?

Well, if you select the text by dragging your mouse *from the right to the left*, the MathML tool will use the *last placeholder* of the template clicked upon. Normally (mouse dragged from the left to the right), the MathML tool uses the first placeholder of the template clicked upon.

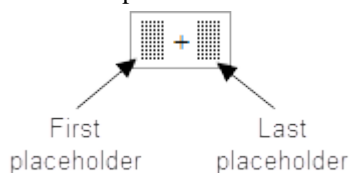

Wrapping the implicitly or explicitly selected element

In some cases, you'll find that the text selection does not allow you to select the MathML element you want. For example, let's suppose you have entered $y = \sqrt{\frac{2x}{3}}$ and the correct equation is $y = \sqrt{\frac{2x}{3}} + 1$. There is no way to select the square root using the text selection.

When this is the case, you'll have to explicitly select the MathML element (for example, by clicking on `m:msqrt` in the Node Path Bar) you want to wrap and then **Ctrl+click**⁶ or **Shift+click** on a template of a palette.

⁶Or **Cmd+click** on the Mac.

Ctrl+click

Wraps implicitly or explicitly selected element in the template clicked upon. Within this template, the first placeholder is substituted with the selected element.


Shift+click

Wraps implicitly or explicitly selected element in the template clicked upon. Within this template, the last placeholder is substituted with the selected element.

3.4. Useful tips

- When you don't understand a template, move your mouse over it and you'll see a useful "balloon help".

Figure 3. Tool tip for the "Invisible Times" binary operation

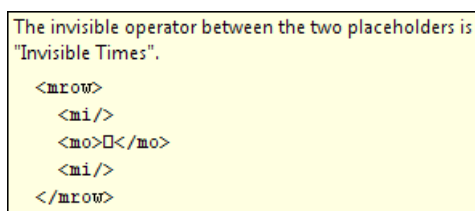


- The editing operations performed using a MathML palette are repeatable. That is, suffice to click elsewhere and press **Ctrl+A** (**Cmd+A** on the mac) to repeat the same replacement operation.
- The editing operations performed using a MathML palette can be recorded using the macro recorder (Tools → Record Macro → Start).
- The MathML tool has a "Text & Space" palette. Use it if you want to insert text which is not `mi`, `mn` or `mo`.
- If you want to edit an `mtable`, for example add a column to a matrix or add an equation to a set of equations, use the table editing commands found in the DocBook menu (e.g. DocBook → Column → Insert Before) and in the MathML menu (e.g. MathML → Row → Copy).
- If you want to insert special characters, use the Characters tool or use the "Insert MathML Character by Name" found in the DocBook menu and in the MathML menu.
- It is fairly easy to tweak the look of an equation created using the MathML tool. For this, you'll generally insert `mSPACE` elements (Edit → Insert After), wrap one or more elements into a `mphantom` or `m padded` element (Edit → Convert [wrap]) or specify attribute values using the Attributes tool. Of course, doing this requires you to learn MathML presentation markup.

4. MathML preferences

Installing the MathML add-on adds a MathML preference sheet to the Preferences dialog box (Options → Preferences). This preference sheet allows you to specify which fonts are to be used when rendering MathML.


Figure 4. The MathML preference sheet

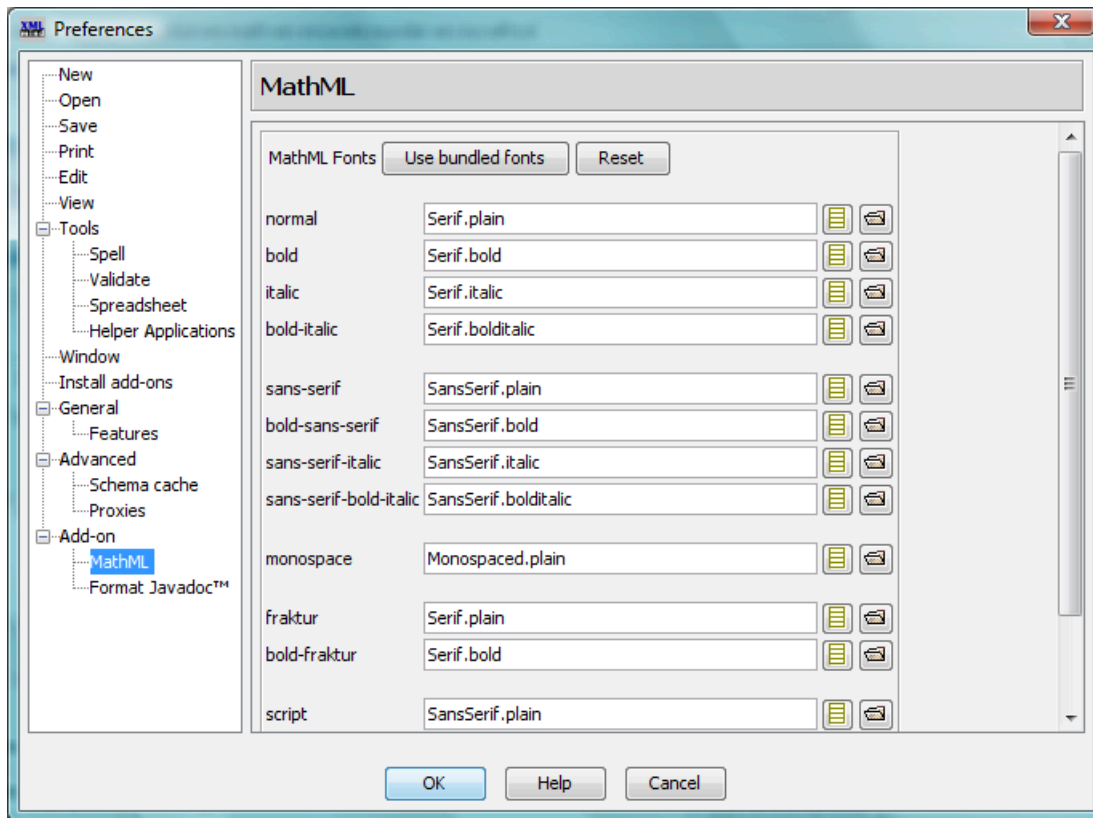

Notice that, by default, the standard Java™ logical fonts (Serif, SansSerif, Monospaced) are also used to render the MathML elements.

There are situations where you'll want to change the above mapping. For example, on the Mac, the Serif logical font is mapped to the Times physical font and this font is intrinsically too small. In such case, you may use the "Choose font from list" button found at the right of each font field. This button displays a list allowing you to choose any True Type font installed on your system.

Figure 5. Dialog box displayed by the "Choose font from list" button

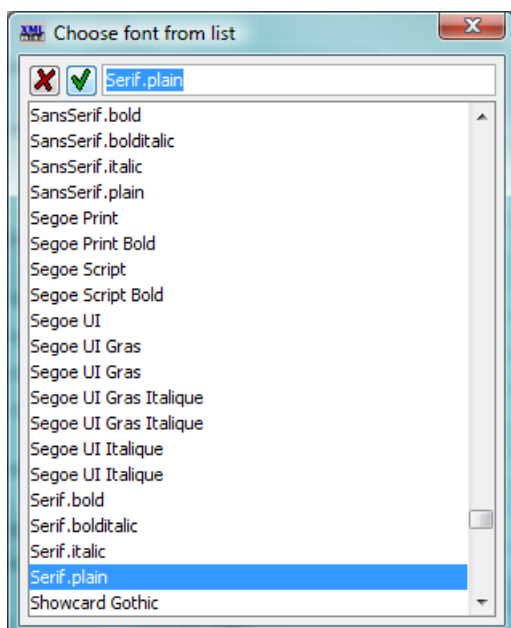

Alternatively, you may use the "Choose font file" button found at the very right of each font field. This button displays the standard file chooser which allows you to specify any .ttf font file, whether this font has been installed or not on your system.

4.1. Bundled math fonts

The MathML add-on is bundled with the following math fonts:

Logical MathML Font	Bundled Font (found in <code>mathml_addon_install_dir/fonts/</code>)	Origin
normal	DejaVuSerif.ttf	DejaVu
bold	DejaVuSerif-Bold.ttf	
italic	DejaVuSerif-Italic.ttf	
bold-italic	DejaVuSerif-BoldItalic.ttf	
sans-serif	DejaVuSans.ttf	
bold-sans-serif	DejaVuSans-Bold.ttf	
sans-serif-italic	DejaVuSans-Oblique.ttf	
sans-serif-bold-italic	DejaVuSans-BoldOblique.ttf	
monospace	DejaVuSansMono.ttf	
fraktur	eufm10.ttf	AMS
bold-fraktur	eufb10.ttf	
script	eusm10.ttf	
bold-script	eusb10.ttf	
double-struck	msbm10.ttf	

If you want to use the all above bundled fonts, simply click on the "Use bundled fonts" button. If you don't like the bundled fonts and want to restore the default settings, click on the Reset button.

Note that the DejaVu fonts are really good looking but lack some glyphs found in the default fonts. The AMS fonts contain very few glyphs, mainly "a" to "z", "A" to "Z" and "0" to "9".

A. Conformance with the MathML 2 W3C standard

MathML support in XMLmind XML Editor passes almost all the MathML 2 tests of the W3C (Presentation section only), modulo the following limitations and specificities. Note that all advanced features (stretching of embellished operators, alignment groups and marks, etc), except one (see below) are generally well supported.

Implementation limitations:

- The content markup is not supported at all. Content elements are rendered as tree views.
- The rendering of accents is very poor. Each MathML element, including a `mo` used as an accent, is represented on screen by a gadget¹. This gadget has the same width, ascent and descent as the characters it contains. In XMLmind XML Editor, there is no way to make a gadget (the accent element) overlap another one (the accented element). Therefore, there is always too much space between the accent element and the accented element.
- Negative dimensions and offsets in elements such as `mpadded` are not supported.
- Limitations related to `mtable`:
 - Vertical and horizontal stretching rules are not applied to `mtcd` elements containing a stretchy operator.

¹A very lightweight control.

- Cells acting as labels in `mtable` elements are not flushed to the right or to the left. You need to explicitly specify a `minlabelspacing` attribute for the `mtable`.
- A percent value for the `width` attribute of an `mtable` is not supported.
- A fit or percent value for the `columnwidth` attribute of an `mtable` is not supported.
- Value `leftoverlap` of attribute `side` of an `mtable` is considered to be equivalent to value `left`. Value `rightoverlap` of attribute `side` of an `mtable` is considered to be equivalent to value `right`.
- Limitations related to `maligngroup` and `malignmark`:
 - A cell containing alignment groups is always left-aligned. That is, in such case, the `columnalign` attribute is always ignored.
 - The `decimalpoint` attribute value is honored in most cases. However, in complex cases, you may have to insert a `malignmark` element to obtain the desired alignment.
 - Empty alignment groups are ignored by the alignment algorithm.

Implementation specificities:

- Line-breaking is not implemented.
- Invisible elements such as `mphantom`, `mSPACE`, etc, are rendered in light gray to allow editing them. Invisible characters such as `⁢`, `⁣`, etc, are rendered using tiny vertically aligned glyphs to allow editing them.
- Comments and processing-instructions having a `math` element ancestor are not rendered at all.
- The `fontfamily` attribute of an `mglyph` element may reference the family of any font installed on the machine running XMLmind XML Editor. The `index` attribute of an `mglyph` element must specify the Unicode code point of the character represented by the `mglyph` (e.g. 97 for character 'a').

B. Contents of the "MathML support" add-on

The "MathML support" add-on contains:

1. A configuration which allows to create standalone documents conforming to the MathML 2 *schema*¹ (presentation markup only, content markup is not supported).

Such standalone documents are typically used the way graphics files are. XHTML example: ``.

Note that this configuration adds not only a MathML menu to the GUI, but also a MathML tool just below the Edit tool, at the top/right of the main window.

2. Additional configuration elements for the DocBook 5 configuration (found in `mathml_addon_install_dir/docbook5/mathml_support.incl`). These additional configuration elements allows to edit MathML elements embedded in DocBook 5 documents (by the means of elements such as `imagedata`, `equation`, `inlineequation`, etc).

These additional configuration elements also add "Insert MathML Character By Name" and "Parse Text As MathML" items to the DocBook menu and extend the table editing commands in order to support the `mml:mtable` element and its descendants.

¹Opening a document starting with:

```
<!DOCTYPE math PUBLIC "-//W3C//DTD MathML 2.0//EN"
"http://www.w3.org/Math/DTD/mathml2/mathml2.dtd">
```

will of course cause the DTD to be used instead of the W3C XML Schema.

A sample DocBook 5 document containing math is found in `mathml_addon_install_dir/docbook5/sample.xml`.

3. Additional configuration elements for the DITA Topic configuration (found in `mathml_addon_install_dir/dita/mathml_support.incl`).

These additional configuration elements add the same facilities as the above DocBook 5 customization.

A sample DITA Topic document containing math is found in `mathml_addon_install_dir/dita/sample.dita`.

4. Additional configuration elements for the XHTML 5 configuration (found in `mathml_addon_install_dir/xhtml5/mathml_support.incl`).

These additional configuration elements add the same facilities as the above DocBook 5 customization.

A sample XHTML 5 page containing math is found in `mathml_addon_install_dir/xhtml5/sample.xhtml`.

5. An image toolkit similar to the one based on JEuclid.

Note that installing this add-on also requires installing the add-on called "*JEuclid image toolkit plug-in*". That gives us *two* image toolkits which allow to convert MathML to a variety of graphics formats:

- The `internal` image toolkit is needed to render the contents of the MathML tool².
- The JEuclid image toolkit is used when XML documents embedding MathML or referencing MathML files are converted to formats such as HTML, PDF, RTF, etc. The JEuclid image toolkit is especially useful when the "*Apache FOP 1.x XSL-FO processor plug-in*" add-on has been also installed because it adds "native MathML support" to the Apache FOP XSL-FO processor.

C. Customizing the MathML add-on

Warning

Normal users are not supposed to do this. The intended audience for this appendix is consultants and local gurus.

1. Customizing the contents of the MathML tool

The contents of the MathML tool is specified by `mathml_addon_install_dir/common/pane/mathml.pane`. Customizing the contents of the MathML tool consists in editing this XML file in XMLmind XML Editor, saving the changes and restarting the application.

2. Bundling better math fonts

The MathML add-on is bundled with a set of fonts [11] which are not used by default. If you want to force the use of this font set or if you want to specify an alternate font set, you'll have to specify a proper value for the `mathml.fonts` preference key.

The syntax of the value of this preference key is:

```
key_value --> logical_font_name ';' font_spec
              [ ';' logical_font_name ';' font_spec ]*

logical_font_name --> 'normal'
                  | 'bold'
                  | 'italic'
                  | 'bold-italic'
                  | 'sans-serif'
```

²Yes, just the contents of the MathML tool!

```
| 'bold-sans-serif'  
| 'sans-serif-italic'  
| 'sans-serif-bold-italic'  
| 'monospace'  
| 'fraktur'  
| 'bold-fraktur'  
| 'script'  
| 'bold-script'  
| 'double-struck'  
  
font_spec --> physical_font_name  
| TTF_file_URI
```

A *physical_font_name* example is "Century Schoolbook L Roman" and not just "Century Schoolbook L", which is a font family.

Example C.1. Force the use of the bundled font set using the command-line

(Remove the newline character found after each ";".)

```
xxe -putpref mathml.fonts "monospace;mathml-config:fonts/DejaVuSansMono.ttf;  
sans-serif;mathml-config:fonts/DejaVuSans.ttf;  
bold-sans-serif;mathml-config:fonts/DejaVuSans-Bold.ttf;  
sans-serif-italic;mathml-config:fonts/DejaVuSans-Oblique.ttf;  
sans-serif-bold-italic;mathml-config:fonts/DejaVuSans-BoldOblique.ttf;  
normal;mathml-config:fonts/DejaVuSerif.ttf;  
bold;mathml-config:fonts/DejaVuSerif-Bold.ttf;  
italic;mathml-config:fonts/DejaVuSerif-Italic.ttf;  
bold-italic;mathml-config:fonts/DejaVuSerif-BoldItalic.ttf;  
fraktur;mathml-config:fonts/eufm10.ttf;  
bold-fraktur;mathml-config:fonts/eufb10.ttf;  
script;mathml-config:fonts/eusm10.ttf;  
bold-script;mathml-config:fonts/eusb10.ttf;  
double-struck;mathml-config:fonts/msbm10.ttf"
```

Note how the "mathml-config:" prefix may be used to refer to the directory where the MathML add-on has been installed. This works because the following rule has been added to *mathml_addon_install_dir/mathml_catalog.xml*:

```
<rewriteURI uriStartString="mathml-config:" rewritePrefix="." />
```

Example C.2. Force the use of the bundled font set when XMLmind XML Editor is deployed using Java™ Web Start

(Remove the newline character found after each ";".)

```
<application-desc main-class="com.xmlmind.xmleditapp.app.WebStart">  
  <argument>-putpref</argument>  
  <argument>mathml.fonts</argument>  
  <argument>monospace;mathml-config:fonts/DejaVuSansMono.ttf;  
sans-serif;mathml-config:fonts/DejaVuSans.ttf;  
bold-sans-serif;mathml-config:fonts/DejaVuSans-Bold.ttf;  
sans-serif-italic;mathml-config:fonts/DejaVuSans-Oblique.ttf;  
sans-serif-bold-italic;mathml-config:fonts/DejaVuSans-BoldOblique.ttf;  
normal;mathml-config:fonts/DejaVuSerif.ttf;  
bold;mathml-config:fonts/DejaVuSerif-Bold.ttf;  
italic;mathml-config:fonts/DejaVuSerif-Italic.ttf;  
bold-italic;mathml-config:fonts/DejaVuSerif-BoldItalic.ttf;  
fraktur;mathml-config:fonts/eufm10.ttf;  
bold-fraktur;mathml-config:fonts/eufb10.ttf;  
script;mathml-config:fonts/eusm10.ttf;  
bold-script;mathml-config:fonts/eusb10.ttf;  
double-struck;mathml-config:fonts/msbm10.ttf</argument>  
</application-desc>
```

The "mathml-config:" prefix works fine even when XMLmind XML Editor is deployed using Java™ Web Start.

D. Integrating MathML with document types other than DocBook 5, DITA Topic and XHTML 5

Warning

Normal users are not supposed to do this. The intended audience for this appendix is consultants and local gurus.

What follows is a description of what has been done to integrate MathML with DocBook 5. Integrating MathML with other document types should be very similar.

1. File `mathml_addon_install_dir/docbook5/mathml_support.incl` contains these additional configuration elements:

```
<configuration xmlns="http://www.xmlmind.com/xmlmind/schema/configuration"
  xmlns:cfg="http://www.xmlmind.com/xmlmind/schema/configuration"
  xmlns:db="http://docbook.org/ns/docbook"
  xmlns:mml="http://www.w3.org/1998/Math/MathML">

  <validate namespace="http://www.w3.org/1998/Math/MathML">❶
    <relaxng location="../../common_rng/mathml2.rng" />
  </validate>

  <include location="../../common/mathml.incl" />❷
  ...
  Extend the DocBook menu and toolbar here
  ...
  <elementTemplate name="mathml">❸
    <equation xmlns="http://docbook.org/ns/docbook">
      <title></title>
      <mml:math xmlns:mml="http://www.w3.org/1998/Math/MathML"
        display="block">
        <mml:mi></mml:mi>
      </mml:math>
    </equation>
  </elementTemplate>
</configuration>
```

- ❶ Dynamically merge the RELAX NG schema of MathML presentation markup (`mathml2.rng`) with the stock RELAX NG schema of DocBook 5 (`docbook.rng`). See below.
- ❷ Include the MathML configuration.
- ❸ Among other extensions, specify one or more templates for elements embedding MathML elements.

How the MathML schema is dynamically merged with the DocBook 5 schema

- a. The RELAX NG schema of DocBook 5 is declared in the stock DocBook 5 configuration `xxe_install_dir/addon/config/docbook5/docbook5.xxe`.

```
<relaxng location="rng/V5.0/docbook.rng" />
```

- b. The `validate` configuration element allows to merge one or more auxiliary DTDs or schemas to the main DTD or schema.

```
<validate namespace="http://www.w3.org/1998/Math/MathML">
  <relaxng location="../../common_rng/mathml2.rng" />
</validate>
```

You'll find:

- the W3C XML Schema for MathML (both presentation and content markup) in `mathml_addon_install_dir/standalone/xsd/mathml2.xsd`,

- the RELAX NG schema for MathML (presentation markup only) in `mathml_addon_install_dir/common_rng/mathml2.rng`,
- the RELAX NG schema Compact Syntax for MathML (presentation markup only) in `mathml_addon_install_dir/common/pane/mathml2.rnc`.

Both `mathml2.rng` and `mathml2.rnc` have been translated from the MathML DTD using `trang`.

However nothing forces you to merge schemas of the same kind. More information in *XMLmind XML Editor - Configuration and Deployment*.

2. The above file is referenced in the stock DocBook 5 configuration (`xxe_install_dir/addon/config/docbook5/docbook5.xxe`) as follows:

```
<!-- Do not report an error if the "MathML support" add-on  
has not been installed. -->  
<include location="--mathml-config:docbook5/mathml_support.incl" />
```

- 1 The "--" prefix before an URL instructs XXE to silently skip the inclusion when the URL cannot be successfully resolved.
- 2 URL `mathml-config:docbook5/mathml_support.incl` resolves to `mathml_addon_install_dir/docbook5/mathml_support.incl` because XML catalog `mathml_addon_install_dir/mathml_catalog.xml` contains the following rule:

```
<rewriteURI uriStartString="mathml-config:" rewritePrefix="." />
```

3. File `mathml_addon_install_dir/docbook5/mathml_support.imp` contains the following additional CSS rules:

```
@import url(../common/mathml.css);  
  
@namespace db5 "http://docbook.org/ns/docbook";  
  
db5 | imagedata:contains-element(mml|math),  
db5 | inlineequation > mml|math,  
db5 | informalequation > mml|math,  
db5 | equation > mml|math {  
  content: "";  
}
```

- 1 Import the CSS stylesheet for MathML elements.
- 2 Suppress the generated content normally used to style the `imagedata`, `inlineequation`, etc, DocBook 5 elements.

4. The above file is referenced in the stock DocBook 5 CSS stylesheet (`xxe_install_dir/addon/config/docbook5/css/docbook5.css`) as follows:

```
/* Do not report an error if the "MathML support" add-on  
has not been installed. */  
@import url(--mathml-config:docbook5/mathml_support.imp);
```